



DESCRIPTION

ClimbTech 5,000-lbf / 22kN Toggle Anchor.

A removable and reusable anchor designed to work in hollow-core concrete or in steel flange with a minimum thickness of 64mm (1/4”).



TLA075N

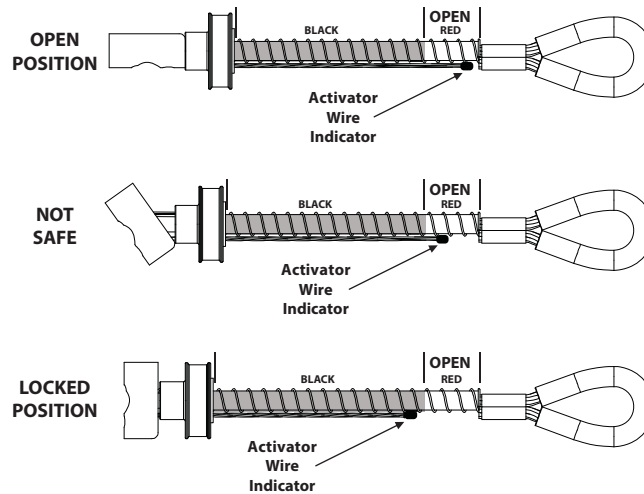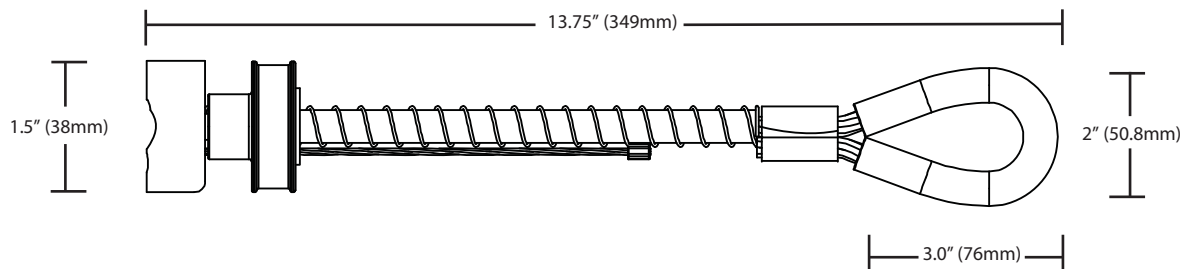

SPECIFICATIONS

- ▼ **UTS**
5,000-lbf / 22kN
- ▼ **Max User Weight**
310-lbs / 140kg
- ▼ **Working Load**
1000-lbf / 454kg

MATERIALS

- ▼ **Toggle Bar**
Stainless Steel
- ▼ **Swage**
Zinc Plated Copper
- ▼ **Ball Shank**
Stainless Steel
- ▼ **Anchor Loop**
Polyurethane
- ▼ **Hole Plug**
Aluminum
- ▼ **Spring**
Zinc Plated Steel
- ▼ **Main Cable**
Aircraft Cable
- ▼ **Activator Wire**
Aircraft Cable

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
TLA075N	Concrete	Blue	5,000-lbf (22kN)	207g
TLA075N-MU	Multi-Use	Silver	5,000-lbf (22kN)	278g