


DESCRIPTION

ClimbTech 5,000-lbf / 22kN Drop Through Anchor

A removable and reusable anchor designed for over head applications. Cable length determined by customers needs.

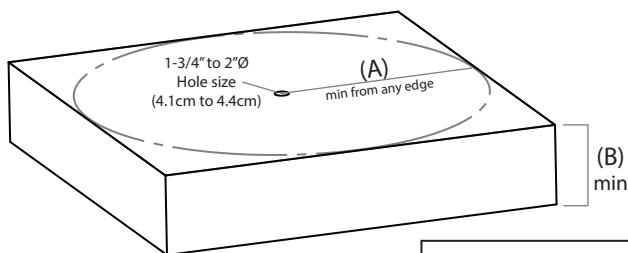

| HOLE REQUIREMENT CHART | | |
|------------------------|---|---------------------|
| Material: | (A)\" Minimum distance from edge/corner | (B)\" thickness |
| Concrete | 12\" in. (30.5 cm) | 4\" in. (10 cm) |
| Steel | 4\" in. (10 cm) | 1/4\" in. (.635 cm) |

SPECIFICATIONS

- ▼ **UTS**
5,000-lbf / 22kN
- ▼ **Max User Weight**
310-lbs / 140kg
- ▼ **Working Load**
1000-lbs / 454kg

MATERIALS

- ▼ **Plate**
Coated Steel
- ▼ **Swivel Ring**
Zinc Plated Steel
- ▼ **Cable**
Aircraft Cable
- ▼ **Tubing**
Polyurethane

PRODUCT CONFIGURATIONS

| MODEL | APPLICATION | COLOR | LOADING | WEIGHT |
|--------|------------------|--------|------------------|--------|
| DTA-5K | Concrete / Steel | Yellow | 5,000-lbf (22kN) | Varies |