


DESCRIPTION

ClimbTech 5,000-lbf (22kN) Drop Through Anchor

The Drop Through Anchor is a removable and reusable anchor designed for overhead applications. Available in three different sizes 4", 6", 12" diameter plates. The cable length is custom and determined by customers needs.

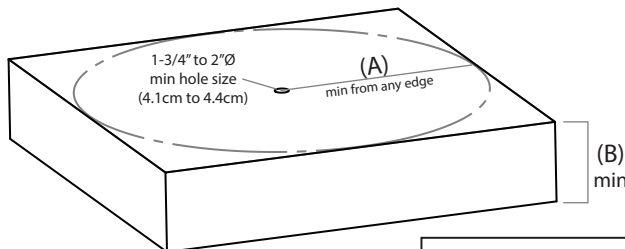

HOLE REQUIREMENT CHART		
Material:	(A)" Minimum distance from edge/corner	(B)" thickness
Concrete	12" in. (30.5 cm)	4" in. (10 cm)
Steel	4" in. (10 cm)	1/4" in. (.635 cm)

SPECIFICATIONS

- ▼ **UTS**
5,000-lbf / 22kN
- ▼ **Max User Weight**
310-lbs / 140kg
- ▼ **Working Load**
1000-lbs / 454kg

MATERIALS

- ▼ **Plate**
Coated Steel
- ▼ **Swivel Ring**
Zinc Plated Steel
- ▼ **Cable**
Aircraft Cable
- ▼ **Tubing**
Polyurethane

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	Plate Size	LOADING	WEIGHT
DTA-5K-4	Concrete / Steel	4"	5,000-lbf (22kN)	Varies
DTA-5K-6	Concrete / Steel	6"	5,000-lbf (22kN)	Varies
DTA-5K-12	Concrete / Steel	12"	5,000-lbf (22kN)	Varies