



DESCRIPTION

Climbtech 5,000-lbf / 22kN Roller Sling



ANSI Z359 certified anchorage connector with sealed ball bearing rollers and spaces for ease of movement while working on bridges or around pipes when other anchor points are not practical.

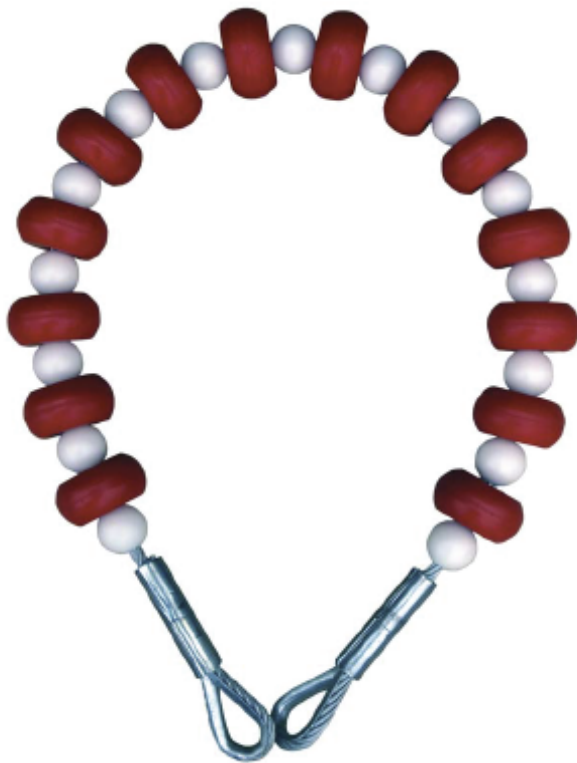

Wheel

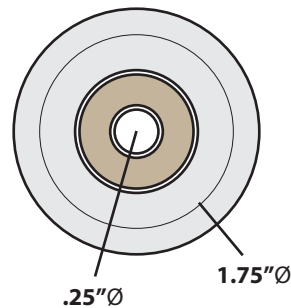

Spherical spacer

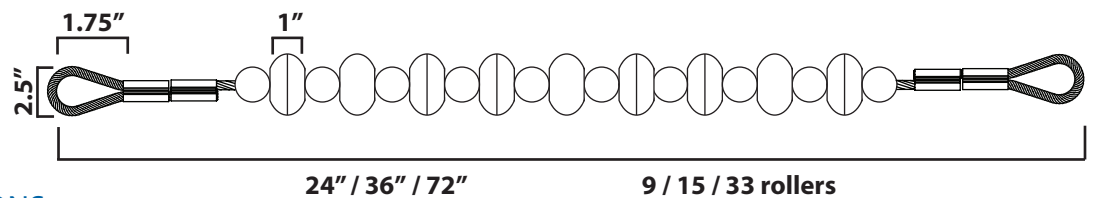

SPECIFICATIONS

▲ **UTS**
5,000-lbf / 22kN

▲ **Max User Weight**
310-lbs / 140kg

▲ **Working Load**
1000-lbs / 454kg

MATERIALS

▲ **Cable**
Aircraft Cable

▲ **Tubing**
Polyurethane

▲ **Rollers**
Polyurethane

▲ **Swage**
Zinc Plated Copper

PRODUCT VARIATIONS

MODEL	LENGTH	COLOR	LOADING	WEIGHT
Roller Sling	2ft, 3ft or 6ft	RED	5,000-lbf (22kN)	1320g (3ft)